

GW-210A SERIES WIRE-IN THERMAL TYPE PHOTOCONTROL

Designed for 10 years and warranted for 6, the GW-210A Series is the premier choice for wire-in thermal type photocontrol needs.


TECHNICAL SPECIFICATION

| | |
|-----------------------|---|
| Standard | ANSI C136.24 & UL773A |
| Rated Volts | 120V/240V/208-277V |
| Frequency | 50-60 Hz |
| Turn-On Light Levels | 10-16 Lux |
| Turn-Off Light Levels | <65 Lux |
| ON/OFF Ratio | 1:5 |
| Time Delay | 30-180 Seconds |
| Fail Mode | ON |
| Operating Temperature | -40°C to +70°C |
| Switch | > 5000 ON/OFF Operations at Rated Load |
| Power Consumption | ≤ 0.7 watts at 120VAC |
| Light Sensor | Cadmium Sulfide (CDS) Cell |
| Housing | Anti-UV Impact Resistant Polycarbonate (PC) |
| Cable | UL1015 18AWG * 16cm |



GW-210A

DIMENSION

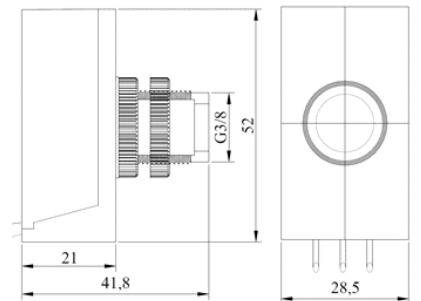

PRODUCT SELECTION INFORMATION

| Model | Rated Volts | Rating Tungsten | Rating Ballast (VA) | Rating LED |
|-----------|-------------|-----------------|---------------------|--------------|
| GW-210A1 | 120V | 1800W | 1800VA | 5A E-Ballast |
| GW-210A2 | 240V | 2000W | 2000VA | 5A E-Ballast |
| GW-210A3 | 208V-277V | 2000W | 2000VA | 5A E-Ballast |
| GW-210LA1 | 120V | 1000W | 1200VA | 2A E-Ballast |
| GW-210LA2 | 240V | 1000W | 1200VA | 2A E-Ballast |
| GW-210LA3 | 208V-277V | 1000W | 1200VA | 2A E-Ballast |

WARRANTY All photocontrols are marked with date of manufacture. This product is warrantied to operate within its original specifications and shall be free of electrical or mechanical defects. Consult factory for the warranty time period. Manufacturer's warranty shall be limited to providing a replacement control of same type and shall not cover costs of removal, replacement or loss of service nor any consequential damages. This warranty is in lieu of and excludes all other warranties either expressed or implied. Full warranty statement is available by consulting factory.