

GW-200/Z/X RECEPTACLES

DESCRIPTION


The GW-200 series receptacles are designed for luminaires without an ANSI C136.10-1996 receptacle. Both GW-200-14 and GW-200Z14 have been listed, and GW-200X14 has been recognized by UL as applicable to US and Canadian safety standards, under their file E188110, Volume 1 & Volume 2.



TECHNICAL DATA

Model No.		GW-200X	GW-200	GW-200Z
Applicable Volt Range		0~480VAC		
Rated Frequency		50/60Hz		
Suggested Loading		AWG#18: 10Amp; AWG#14: 15Amp		
Ambient Temperature		-40°C ~ + 70°C		
Related Humidity		99%		
Overall Dimensions (mm)		65 Dia. x 38.5	65 Dia. x 65	
Accessory	Back/Front		●	●
	Cover			
	Zinc Alloy		●	●
	Lock Nut			
	Mounting			●
	Plate/Base			30x(70+130)
Leads			6" Min	
Weight (approx.)		80g	105g	135g

5/13/2018

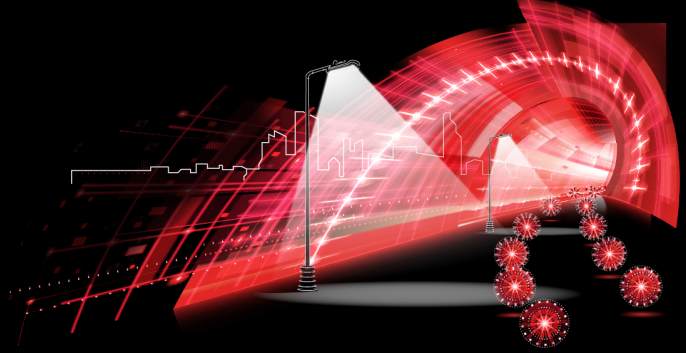

Installation

Disconnect power at the receptacle according to the diagram shown on the right. Install the photocontrol facing NORTH. Adjust the receptacle position if necessary. Drilling template will be provided upon request.

