



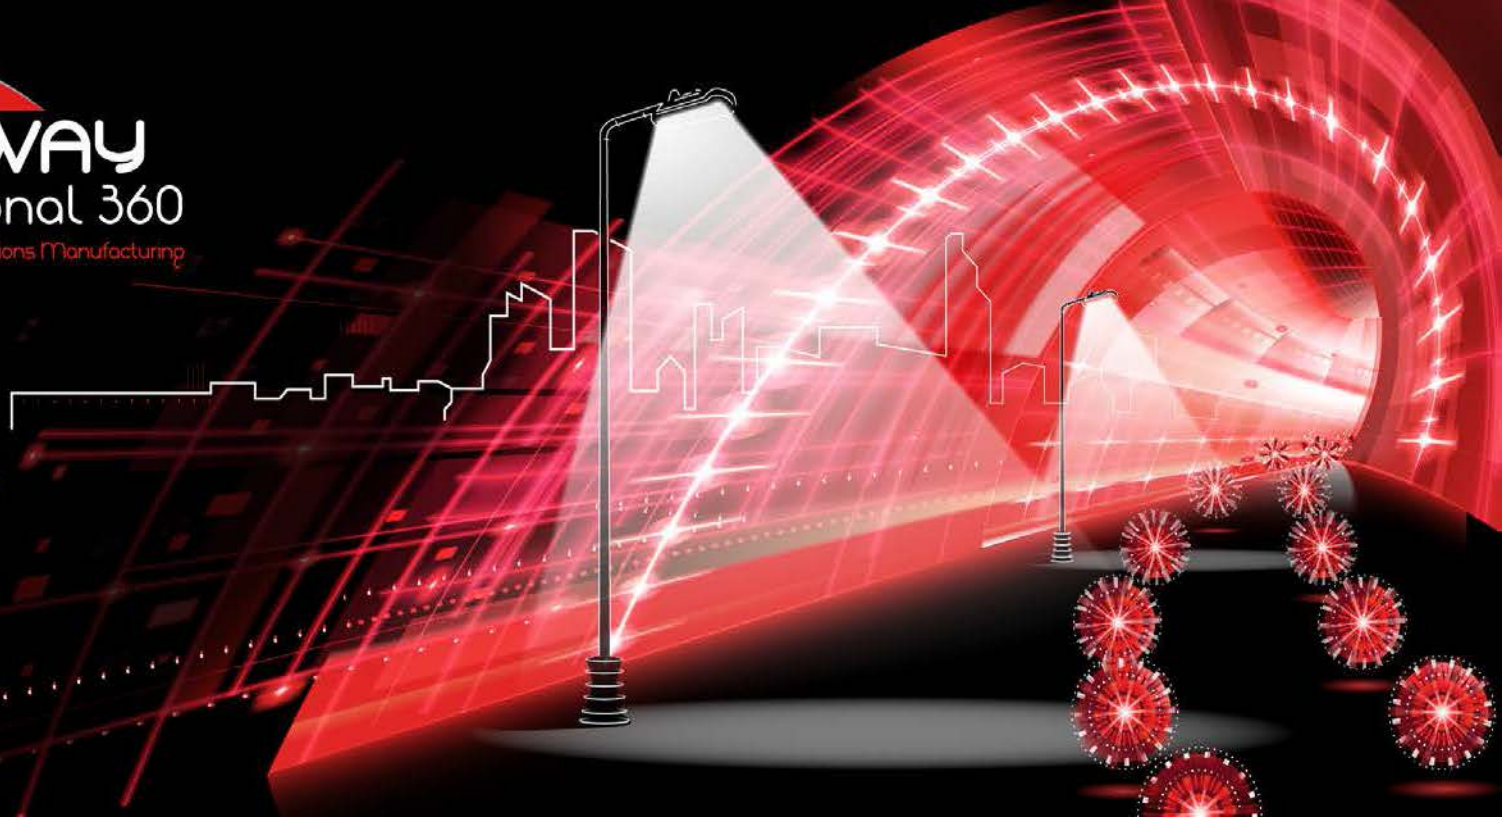

ADDRESSING YOUR CONTROL NEEDS AROUND THE GLOBE

- Products
- Technology
- Services
- Global

Address: 260 Quigley Blvd., Suite 135, New Castle, DE 19720
Phone: 302.250.4990
Website: GatewayIntl360.com

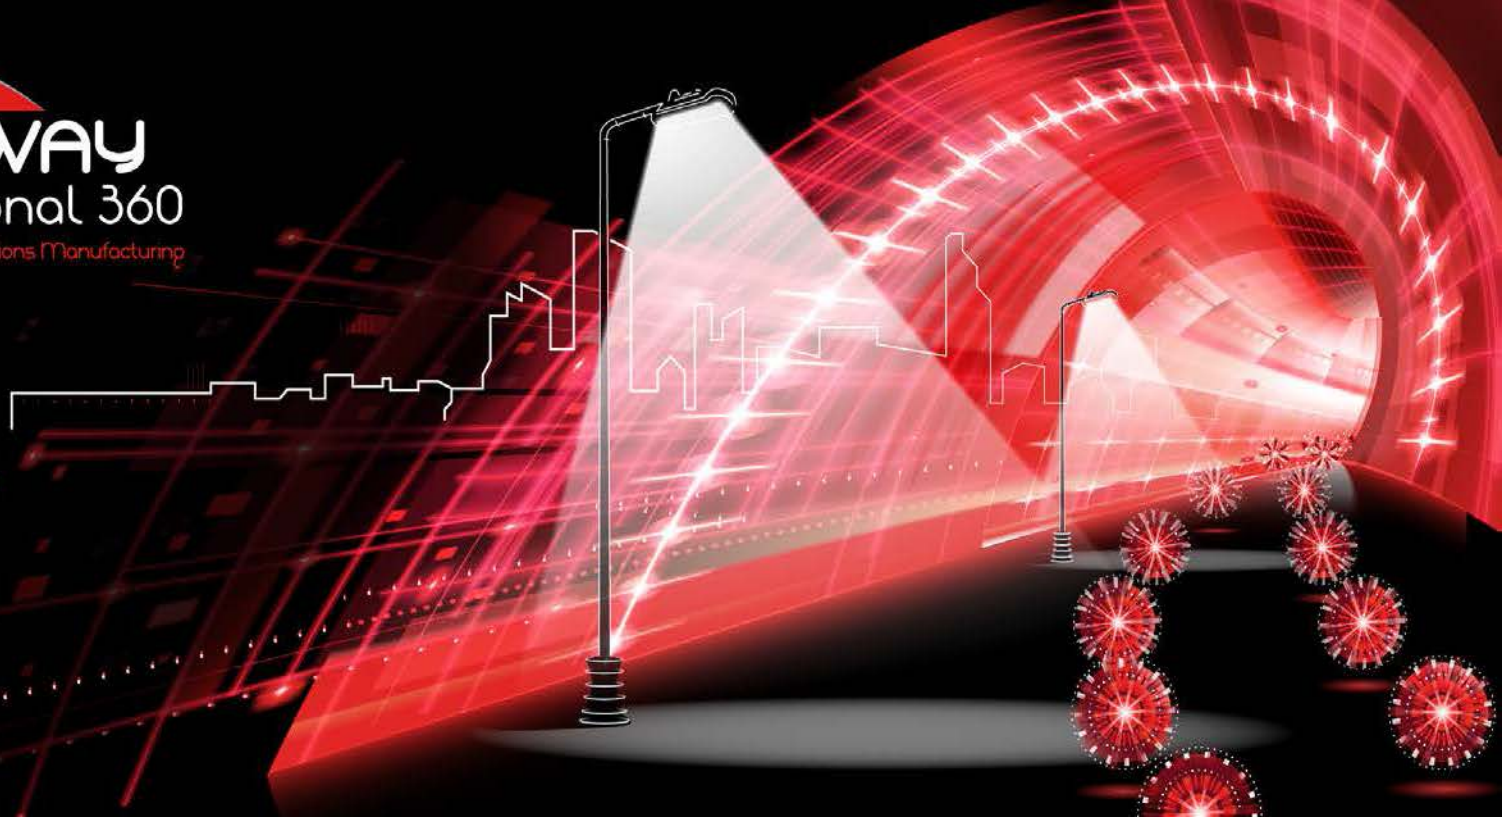


PRODUCTS:

- [WIRE-IN THERMAL TYPE PHOTOCONTROL](#)
- [STANDARD PHOTOCONTROL](#)
- [CAPS AND DIMMING PHOTOCONTROLS](#)
- [GW360 INTELLIGENT LIGHTING SOLUTIONS](#)
- [RECEPTACLES](#)

Address: 260 Quigley Blvd., Suite 135, New Castle, DE 19720
Phone: 302.250.4990
Website: GatewayIntl360.com



Wire-In Thermal Type Photocontrol | FAMILY TREE

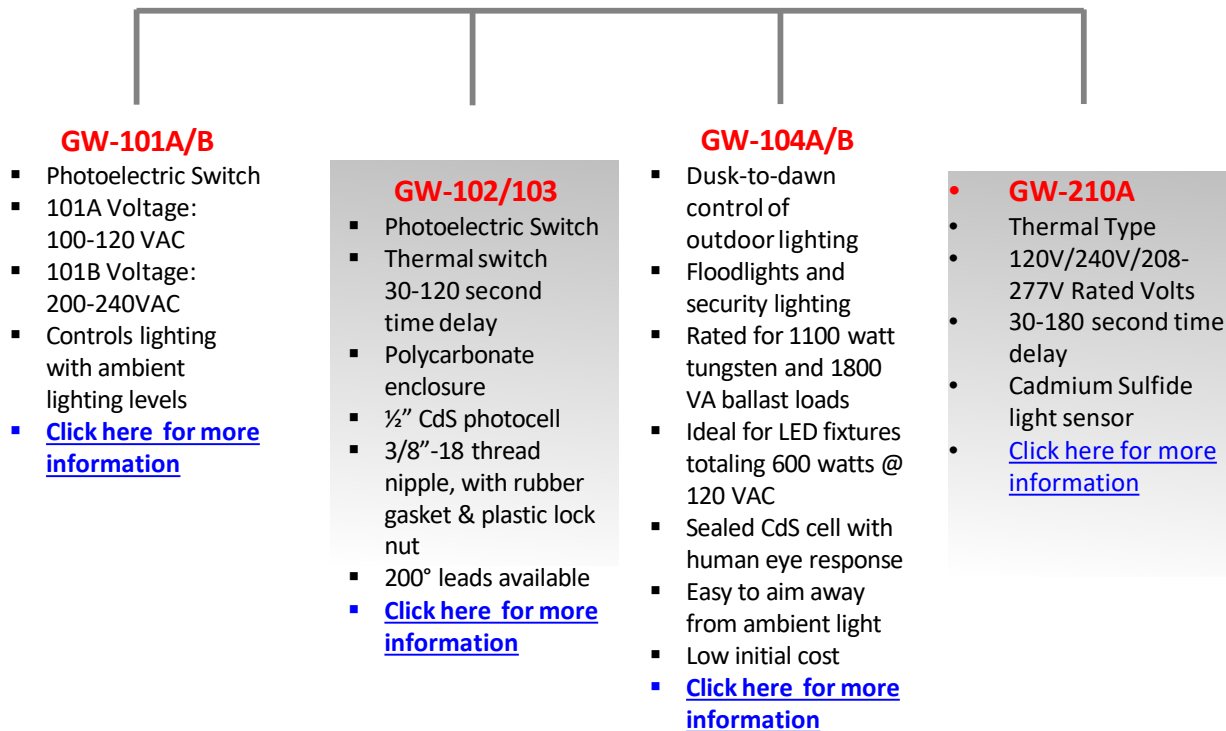



Wire-In Thermal Type Photocontrol | FAMILY TREE

GW-403C

- Photoelectric Switch
- Wide input voltage: 120-277 VAC
- Sealed light sensor
- Instant turn-on and 5-10 second turn-off time delay
- UL Listed
- [Click here for more information](#)

GW-405C

- Photoelectric Switch
- Wide input voltage: 120-277VAC
- Controls lighting with ambient lighting levels
- Instant turn-on and 3-10 second turn-off time delay
- UL Listed
- [Click here for more information](#)

GW-423C

- Photoelectric Switch
- Wide input voltage: 120-277VAC
- Controls lighting with ambient lighting levels
- Instant turn-on and 5-10 second turn-off time delay
- [Click here for more information](#)



STANDARD PHOTOCONTROLS | FAMILY TREE

GW-105BU-20

- Standard Control Series
- 105-305 VAC
- 320J MOV
- 9500-amp surge
- Blue cover
- [Click here for more information](#)

GW-110BR-20

- Standard Control Series
- 105-305 VAC
- 320J MOV
- 9500-amp surge
- Brown cover
- [Click here for more information](#)

GW-115BK-20

- Standard Control Series
- 105-305 VAC
- 320J MOV
- 9500-amp surge
- Black cover
- 2-5 sec delay turn off
- [Click here for more information](#)

GW-LL127-1.5BK-40

- Long Life Electronic Photocontrol
- 105-305 VAC
- Meets ANSI C136.10-2016
- [Click here for more information](#)

GW-347/480

- Long Life Electronic Photocontrol
- Dual Voltage
- Meets ANSI C136.10-2016 Proposed
- 345-480VAC
- [Click here for more information](#)



STANDARD PHOTOCONTROLS | FAMILY TREE

GW-202

- Thermal Switch Photocontrol
- 310-380 VAC
- [Click here for more information](#)

GW-226

- UK standard product
- Microprocessor/program based photo-electronic control
- IR-filtered Phototransistor
- Midnight Turn Off
- GW-226 is rated 105-305VAC
- [Click here for more information](#)



CAPS

GW-208

- Shorting Cap
- Various Colors
- 0-480V
- [Click here for more information](#)

GW-209

- Open Cap
- 0-480V
- [Click here for more information](#)

DIMMING PHOTOCONTROLS

0-10V Dimming

GW-130

- Twistlock
- Remote Switch, dimming in increments of 1 (1-100)
- Single-luminaire or networking operation
- IP65 Ingress protection
- 85-305VAC voltage range
- Evacuation/SOS strobe function
- Automatic reset following a power outage
- [Click here for more information](#)

GW-132

- Remote Switch, dimming in increments of 1 (1-100)
- Single-luminaire or networking operation
- IP65 Ingress protection
- 85-305VAC voltage range
- Evacuation/SOS strobe function
- Automatic reset following a power outage
- [Click here for more information](#)



GW360 Intelligent Nodes [Intelligent Lighting Solution]

GW-150

- 85-305VAC voltage range
- Standard interface, modular product
- IP65 protection grade
- Remote switch, dimming luminaire
- Remote monitoring of voltage, current, power, and other parameters
- Single-fixture or networking operation available
- [Click here for more information](#)

GW-1500

- Mainframe of 9-24V
- 4G uplink communication, Wireless download communication
- Collect the working status and data of terminal nodes
- 256 node capabilities
- Power down detection
- Automatic time calibration function
- Active fault alarm

Address: 260 Quigley Blvd., Suite 135, New Castle, DE 19720

Phone: 302.250.4990

Website: GatewayIntl360.com



RECEPTACLES | FAMILY TREE

GW-210/210K

- BS 5972:1980/ANSI C136.10-1996
- 360° field rotation
- Wall mount
- 0-240V, 10amp MAX
- [Click here for more information](#)

GW-220

- Compact Receptacle for Luminaires
- UL773/ANSI C136.10 1996
- 360° field rotation
- Small size, low cost
- [Click here for more information](#)

GW-230

- Receptacle Luminaires assembly
- UL773/ANSI C136.10-1996
- 360° field rotation
- 3 Pin
- Mounting Ring
- [Click here for more information](#)

GW-605/605R

- Twist-Lock Photocontrol Receptacle
- Conforms ANSI C136.41
- Available in 3, 5 & 7 Pin
- [Click here for more information](#)

GW-635

- Twist-Lock Photocontrol Receptacle
- ANSI C136.41
- 360 field rotation
- Available in 3, 5 & 7 Pin
- [Click here for more information](#)



RECEPTACLES | FAMILY TREE

GW-615

- Twist-Lock
Photocontrol
Receptacle
- Conforms ANSI
C136.41
- Available in 3, 5
& 7 Pin
- [Click here for more
information](#)

GW-625/625R

- Wide input voltage: 105-
480V
- Silicone Gasket
- UL listed
- Bakelite housing
- Complies with ANSI
C136.10
- [Click here for more
information](#)